


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. DEFAULT BREAKOUT: 24". CUSTOM LENGTH ON REQUEST.
7. FIBERS 13 TO 72 ARE NOT SHOWN DUE TO SPACE CONSTRAINT.
8. ADDITIONAL SPIRAL WRAP ADD FOR STRAIN RELIEF. NOT SHOWN FOR DRAWING CLARITY.
9. HEAT SHRINK FOR STRAIN RELIEF.
10. DIELECTRIC STRENGTH MEMBER TRIMMED HERE.
11. NON-DIMENSIONED ITEMS ARE BEST FIT.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/02/2016	A.J.
B	2586	ASSEMBLY DIMENSION UPDATE. SPOOL UPDATE. TEST REPORTS.	K.T.	03/22/2016	A.J.

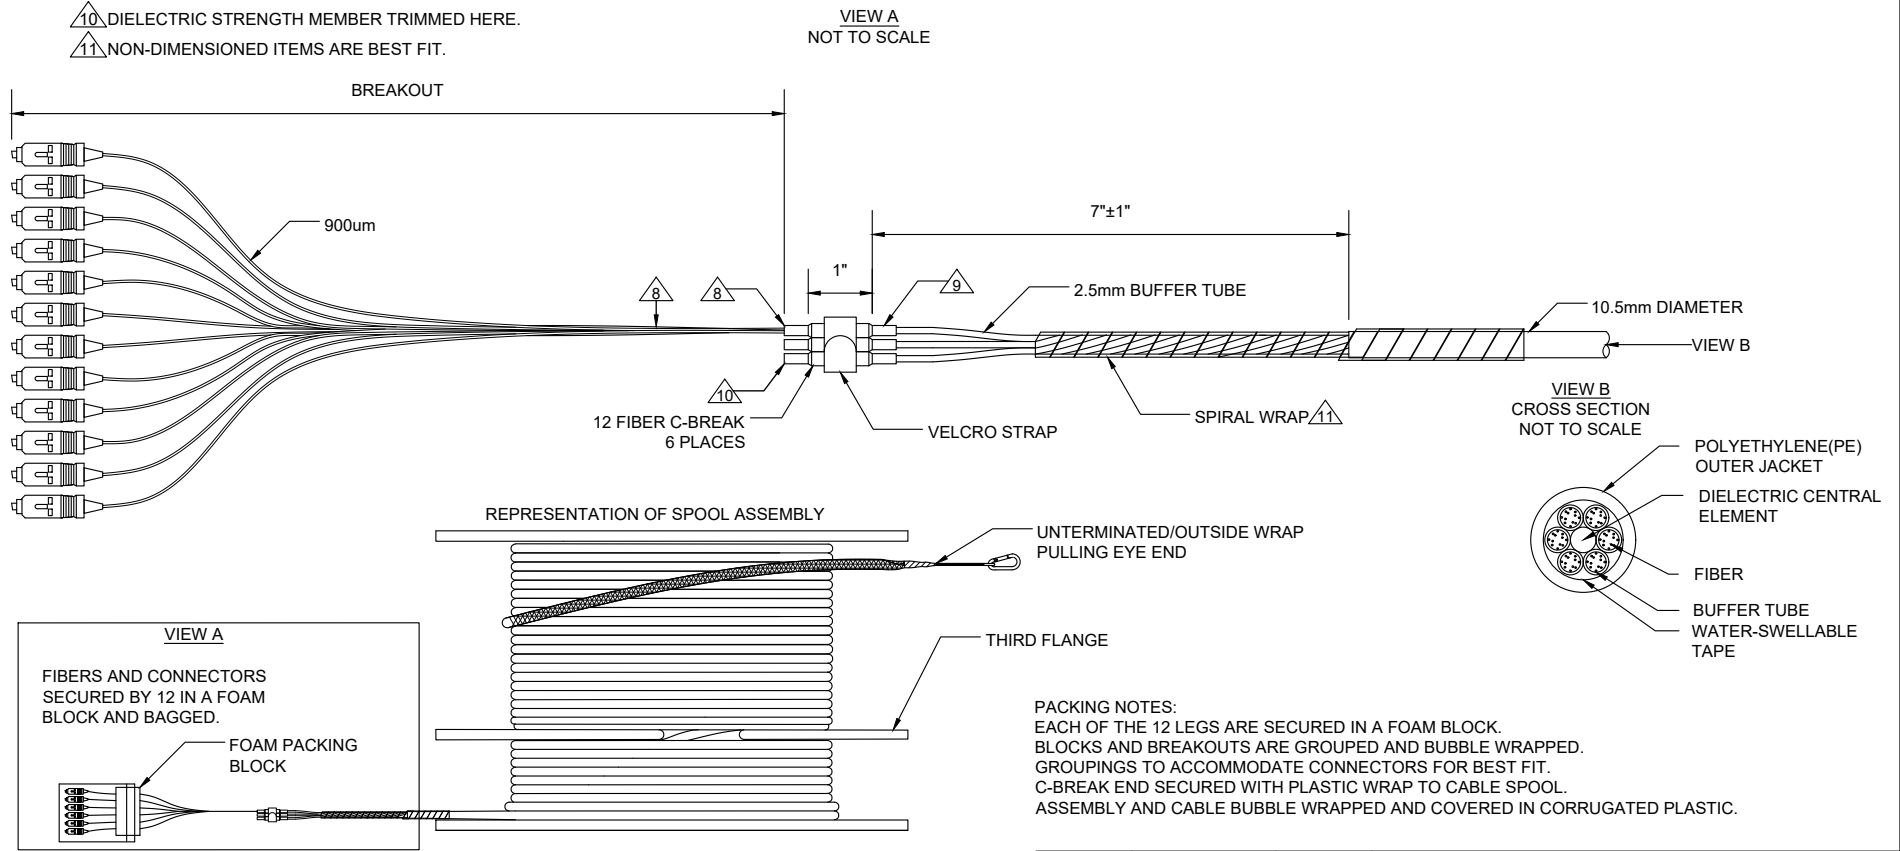

**PACKING NOTES:**  
 EACH OF THE 12 LEGS ARE SECURED IN A FOAM BLOCK.  
 BLOCKS AND BREAKOUTS ARE GROUPED AND BUBBLE WRAPPED.  
 GROUPINGS TO ACCOMMODATE CONNECTORS FOR BEST FIT.  
 C-BREAK END SECURED WITH PLASTIC WRAP TO CABLE SPOOL.  
 ASSEMBLY AND CABLE BUBBLE WRAPPED AND COVERED IN CORRUGATED PLASTIC.

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	PULLING EYE
3	1	C-BREAK 2: SINGLE LEG BREAKOUT; 900 um TIGHT BUFFERED FIBERS
2	AR	SINGLE-MODE OS2 OSP ALTOS® CABLE, BLACK: CORNING
1	72	SC-CLIPPED APC POLISH; GREEN HOUSING, GREEN BOOT: PERFORMA

TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.50dB	0.20dB	>=65dB	68dB

DRAWN BY:	K. THOMAS	03/02/2016
APVD BY:	A. JENSEN	03/22/2016
DIMENSIONS: METRIC [IMPERIAL]		
PROPRIETARY AND CONFIDENTIAL		
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		



**C-ENTERPRISES**  
Connecting Today's Infrastructures

C ENTERPRISES  
 2445 CADES WAY  
 VISTA CA 92081  
 760-599-5111

**TITLE: SARD72SBXXIRPSX VERSION 1**

SIZE	DWG. NO.	REV
A	SARD72SBXXIRPSX-VER1	B

SCALE: NOT TO SCALE      SHEET 1 OF 1