


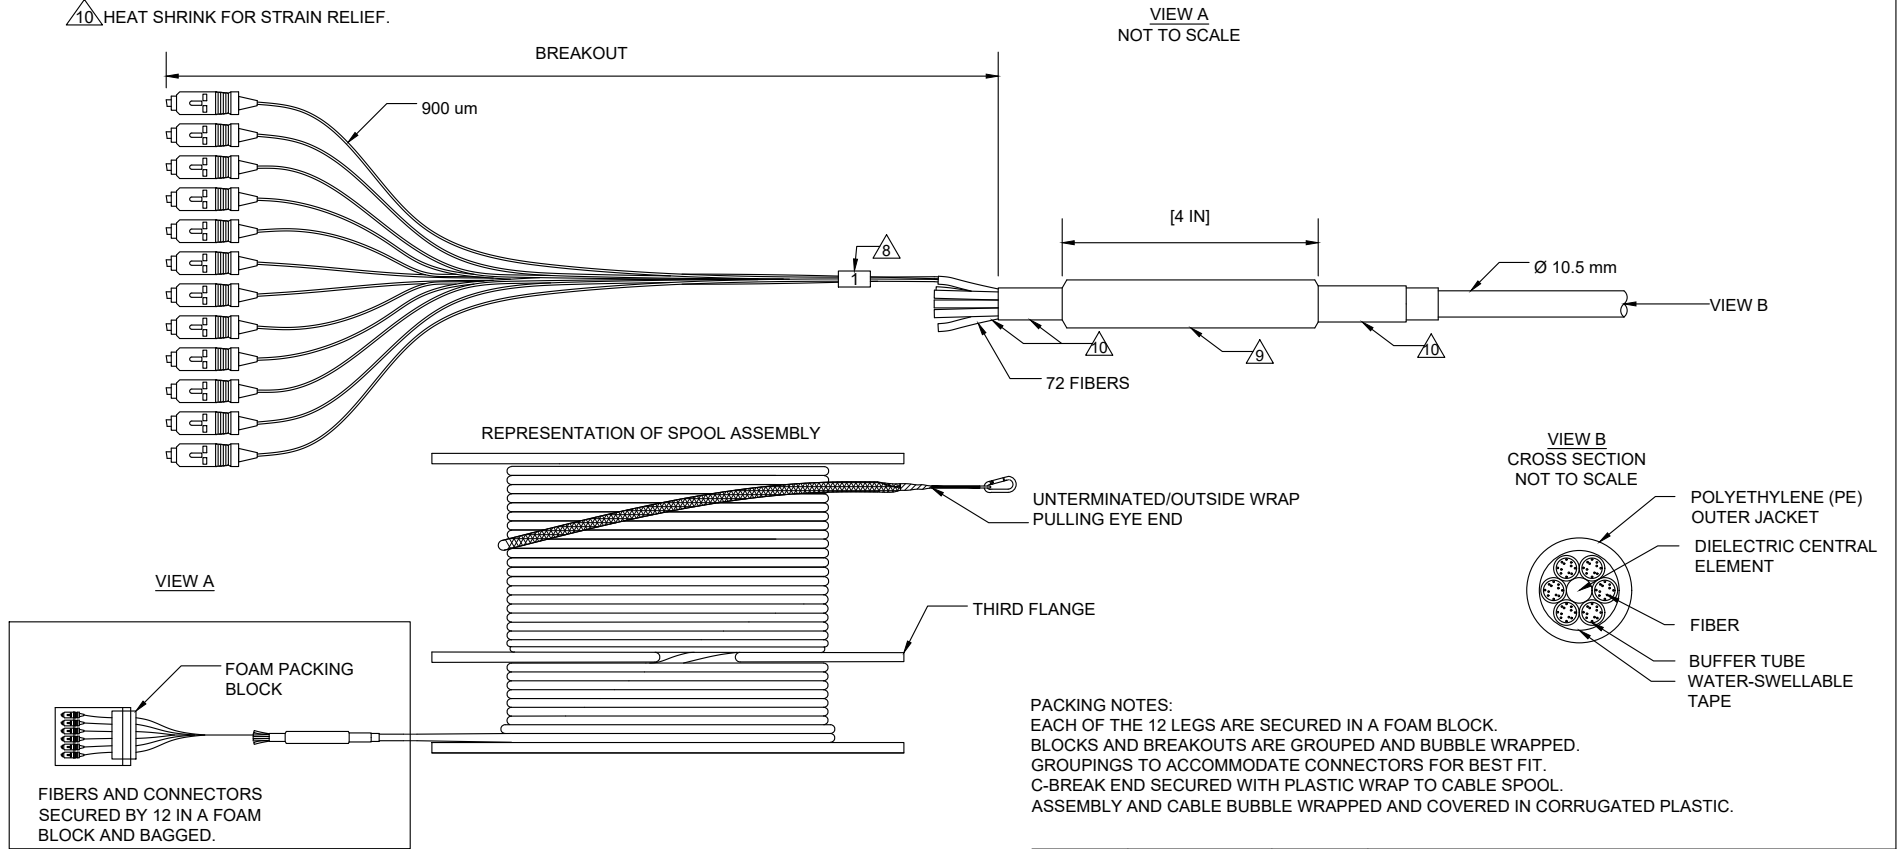


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. DEFAULT BREAKOUT: 24 INCHES. CUSTOM LENGTH ON REQUEST.
7. FIBERS 13 TO 72 ARE NOT SHOWN DUE TO SPACE CONSTRAINT.
- 8  FIBER LEG THERMAL LABEL.
- 9  C-BREAK
- 10  HEAT SHRINK FOR STRAIN RELIEF.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/02/2016	A.J.
B	2586	ASSEMBLY DIMENSION UPDATE. SPOOL UPDATE. TEST REPORTS.	K.T.	03/28/2016	A.J.



BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	PULLING EYE
3	1	C-BREAK 2: SINGLE LEG BREAKOUT; 900 um TIGHT BUFFERED FIBERS
2	AR	SINGLE-MODE OS2 OSP ALTOS® CABLE, BLACK: CORNING
1	72	SC-CLIPPED APC POLISH; GREEN HOUSING, GREEN BOOT: PERFORMA

TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.50dB	0.20dB	>=65dB	68dB

DRAWN BY:	K. THOMAS	03/02/2016
APVD BY:	A. JENSEN	03/28/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]		TITLE: SARD72SBXXIRPSX VERSION 2	
PROPRIETARY AND CONFIDENTIAL	SIZE A	DWG. NO. SARD72SBXXIRPSX-VER2	REV B
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SCALE: NOT TO SCALE	SHEET 1 OF 1