


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A TYPICAL. A-A / B-B STRAIGHT ON BY REQUEST. REMOVABLE CLIPS
5. 2.0 mm DIAMETER TYPICAL. 1.6 mm AND 3.0 mm AVAILABLE.
6. POLISH TYPES: PC, UPC, APC.
7. TESTED TO 850 nm (MULTIMODE) OR TO 1550 nm (SINGLE-MODE) UPON REQUEST.
8. ALTERNATE COLOR JACKETS LISTED IN C ENTERPRISES STANDARDS.
9. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
10. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

| REV | ECR | DESCRIPTION | BY | DATE | CHECKED |
|-----|-----|-------------------------------|------|------------|---------|
| A | - | INITIAL RELEASE | J.V. | 03/19/2015 | - |
| B | - | DRAWING FORMAT & BLOCK UPDATE | K.T | 03/11/2016 | A.J. |
| B.1 | - | TEST PERFORMANCE TABLE. | K.T. | 11/15/2016 | A.J. |

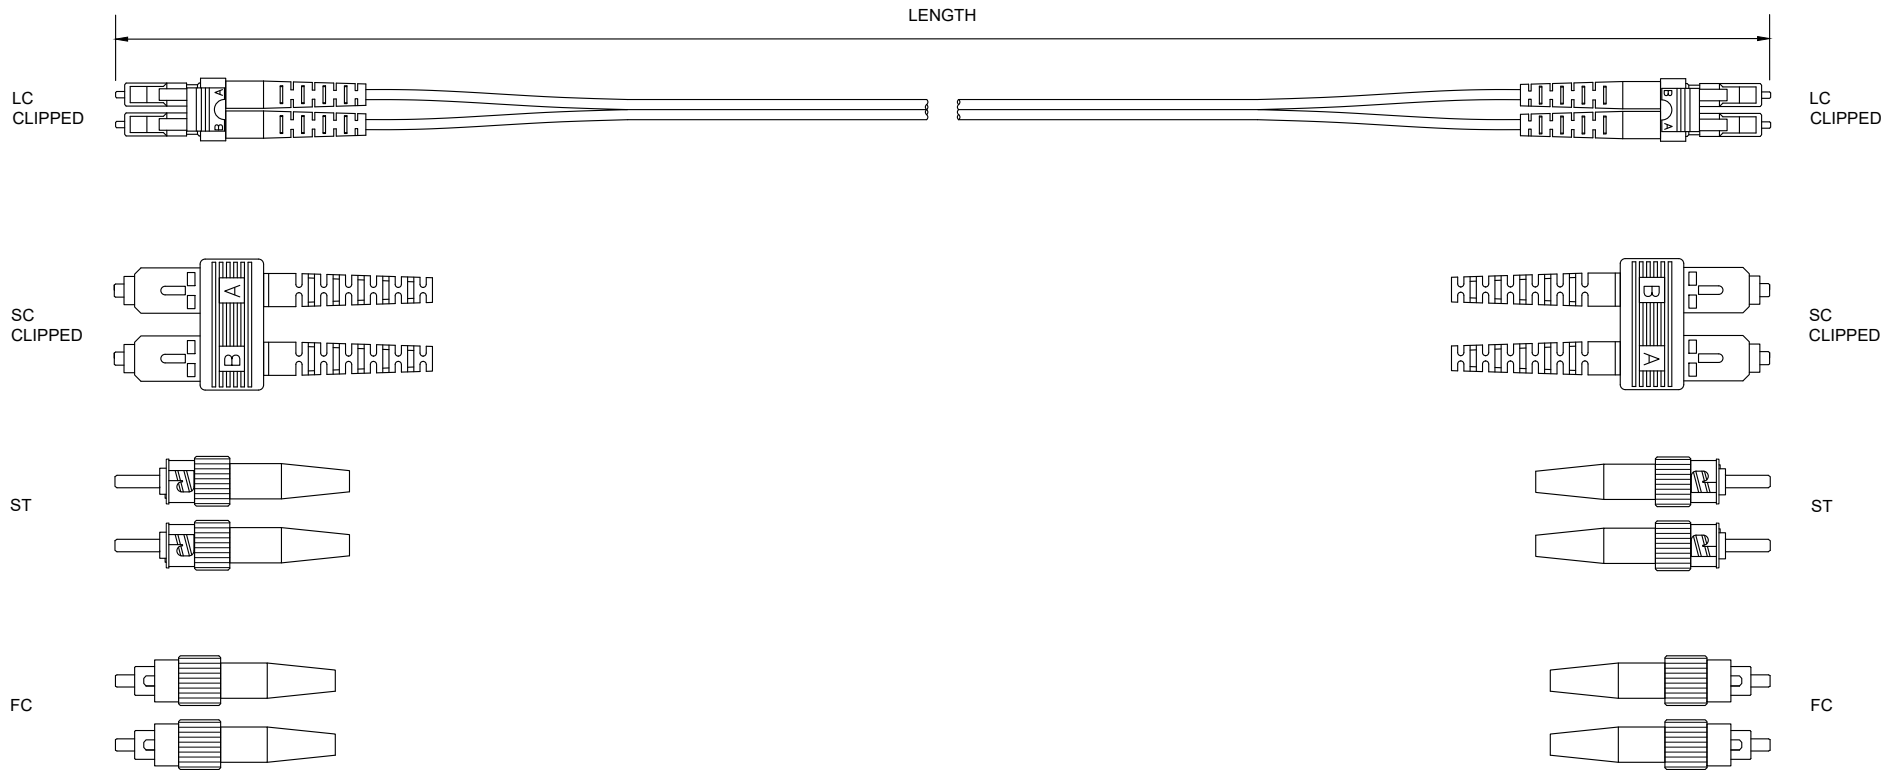

| TEST PERFORMANCE | | | | | | |
|------------------|------------|--------|-----------|-----------|-----------|-----------|
| TYPE | TEST FREQ. | FINISH | MAX. I.L. | TYP. I.L. | MIN. R.L. | TYP. R.L. |
| MULTIMODE | 1300 nm | PC | <=0.75dB | 0.20dB | N/A | 25dB |
| SINGLE-MODE | 1310 nm | UPC | <=0.50dB | 0.20dB | >=50dB | 60dB |
| SINGLE-MODE | 1310 nm | APC | <=0.50dB | 0.20dB | >=65dB | 68dB |

| | | |
|-----------|-----------|------------|
| DRAWN BY: | K. THOMAS | 02/05/2016 |
| APVD BY: | A. JENSEN | 03/11/2016 |



C ENTERPRISES
 2445 CADES WAY
 VISTA CA 92081
 760-599-5111

DIMENSIONS: METRIC [IMPERIAL]
 PROPRIETARY AND CONFIDENTIAL
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

| | | |
|--------------------------|-------------------------------|--------------|
| TITLE: FIBER DUPLEX AFOP | | |
| SIZE A | DWG. NO. FIBER-DUPLEX-AFOP | REV B.1 |
| SCALE: NOT TO SCALE | | SHEET 1 OF 1 |