


NOTES: UNLESS OTHERWISE SPECIFIED


- 1. 900 um BREAKOUT CROSS SECTION.
- 1.1. FOR USE WITH TIGHT-BUFFER CABLE ASSEMBLIES.
- 2. C ENTERPRISES ENGINEERING STANDARDS APPLY.
- 3. ARAMID YARN SECURED TO CABLE JACKET UNDER ADHESIVE HEAT SHRINK FOR PULLING EYE SUPPORT.
- 4. NON-SUBUNITIZED CABLE: 2-24 FIBERS.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	05/18/2016	A.J.

VIEW A  
CROSS SECTION  
NOT TO SCALE

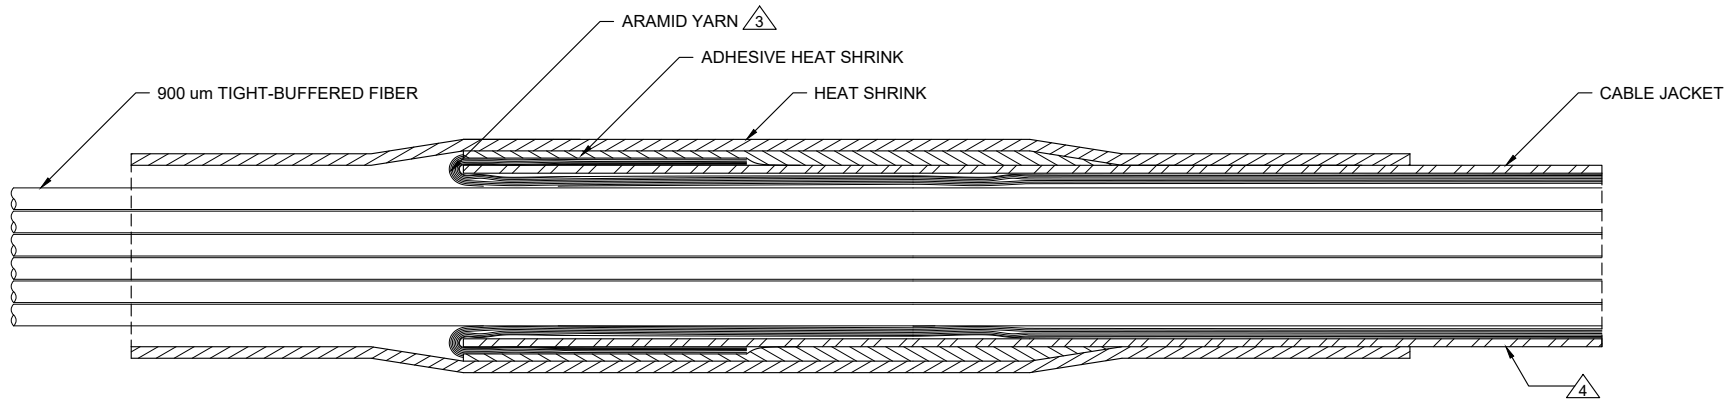

VIEW A  
CROSS SECTION

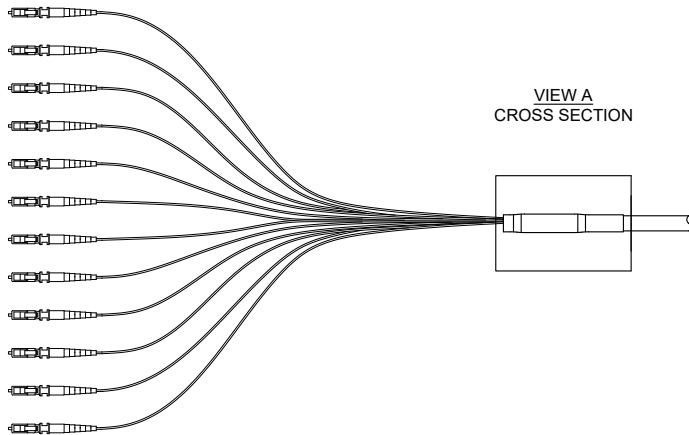

DRAWN BY:	K. THOMAS	05/18/2016	 <b>C-ENTERPRISES</b> <i>Connecting Today's Infrastructures</i>	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY:	A. JENSEN	05/18/2016		TITLE: 900 um BREAKOUT CROSS SEC.	
DIMENSIONS: METRIC [IMPERIAL]			SIZE <b>A</b>	DWG. NO. 900um-CROSS-SEC	REV <b>A</b>
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE		SHEET 1 OF 1