
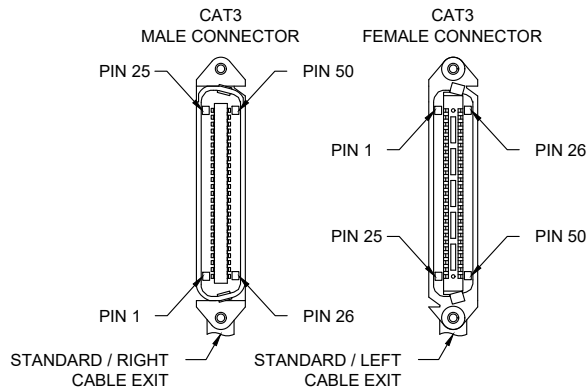



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.2.
3. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
4. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
5. STANDARD TELCO 25 PAIR PINOUT.
  - 5.1. CONFIGURATION IS STRAIGHT THROUGH.
  - 5.2. 1-1, 26-26 (PAIR 1) CONTINUING TO 25-25, 50-50 (PAIR 25).
6. CONNECTORS:
  - 6.1. RING: PINS 1-25
  - 6.2. TIP: PINS 26-50

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/14/2017	A.J.

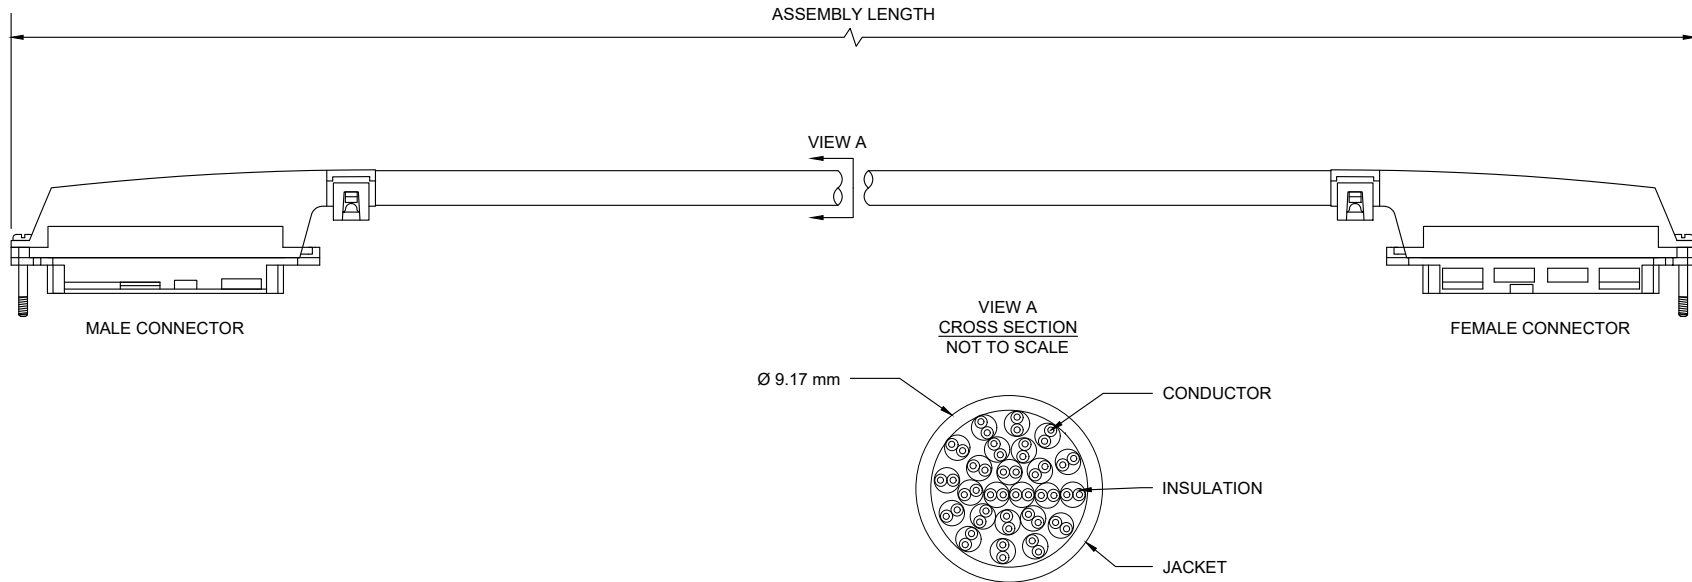

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	AR	CAT3 24 AWG UTP SOLID PVC CMR CABLE; 25 PAIRS
2	1	C50 MALE CAT3 CONNECTOR, STANDARD EXIT
1	1	C50 FEMALE CAT3 CONNECTOR, STANDARD EXIT

DESCRIPTION: TELCO CABLE, CAT3, FEMALE 90deg STANDARD EXIT / MALE 90deg STANDARD EXIT, UTP SOLID PVC CMR CABLE			
DRAWN BY:	K. THOMAS	06/14/2017	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	06/14/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: CAT3 FEMALE 90deg/MALE 90deg UTP	
PROPRIETARY AND CONFIDENTIAL			
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			
SIZE	DWG. NO.	REV	
A	T3FAMA	A	
SCALE: NOT TO SCALE			SHEET 1 OF 1