
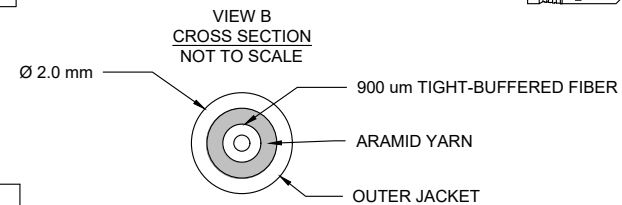

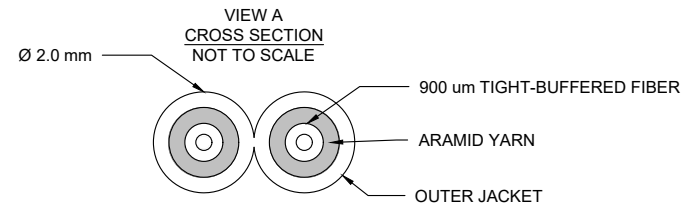


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. DETAILED DEPICTIONS OF CONNECTORS AND SPECIFIC ASSEMBLIES AVAILABLE.
7. REFER TO SALES FOR FURTHER DETAILS.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	07/25/2017	A.J.

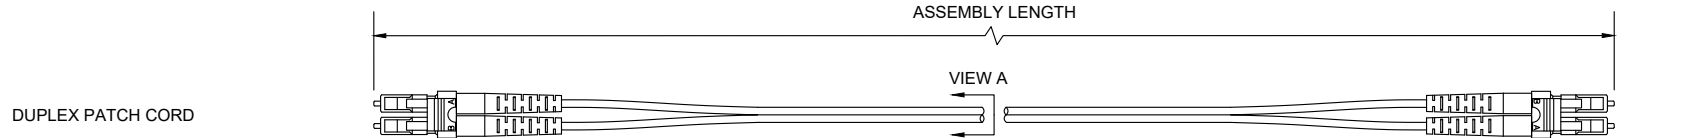

LC	SC
LC CLIPPED	SC CLIPPED
LC UNIBOOT	MTRJ
FC	ST

PERFORMANCE RANGE: PERFORMA
ASSEMBLY OPTIONS
CONNECTORS: LC*, LC UNIBOOT, SC*, FC, ST, MTRJ, UNTERMINATED END, LEGACY CONNECTOR
CONNECTOR POLISH: UPC, APC, PC
FIBER MODE: SINGLE-MODE, OM1, OM2, OM3, OM4
CABLE JACKET RATING: OFNR, OFNP, LSZH
CABLE: 1.6 mm, 2.0 mm, 3.0 mm. SIMPLEX OR DUPLEX
POLARITY: CROSS-OVER (A-B, B-A), STRAIGHT (A-A, B-B)
ADDITIONAL OPTIONS: CUSTOM BOOTS, CUSTOM JACKET COLOR, LABELS, TEST REPORT, PULLING EYE, SPOOLED
* CLIPPED DUPLEX OPTION AVAILABLE

DESCRIPTION: SIMPLEX OR DUPLEX PATCH CORD, PERFORMA	
DRAWN BY: K. THOMAS	07/25/2017
APVD BY: A. JENSEN	07/25/2017
DIMENSIONS: METRIC [IMPERIAL]	
PROPRIETARY AND CONFIDENTIAL	
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.	
	
C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
TITLE: PERFORMA PATCH CORD ASSEMBLIES	
SIZE: A	DWG. NO.: PERFORMA_PATCH_CORD
SCALE: NOT TO SCALE	REV: A
SHEET 1 OF 1	