
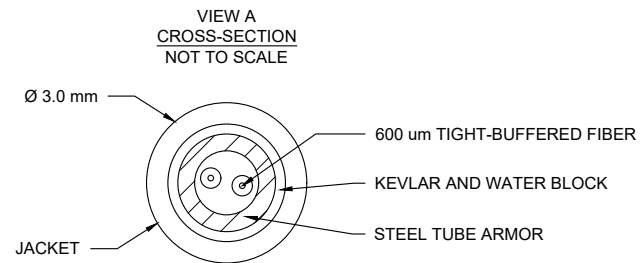


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. CLIPPED A-B/B-A.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP.
8. HEAT SHRINK FOR STRAIN RELIEF.
9. ADHESIVE HEAT SHRINK.
10. SINGLE LEG BREAKOUT: OVERALL DIAMETER: 6 mm.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	10/27/2017	A.J.

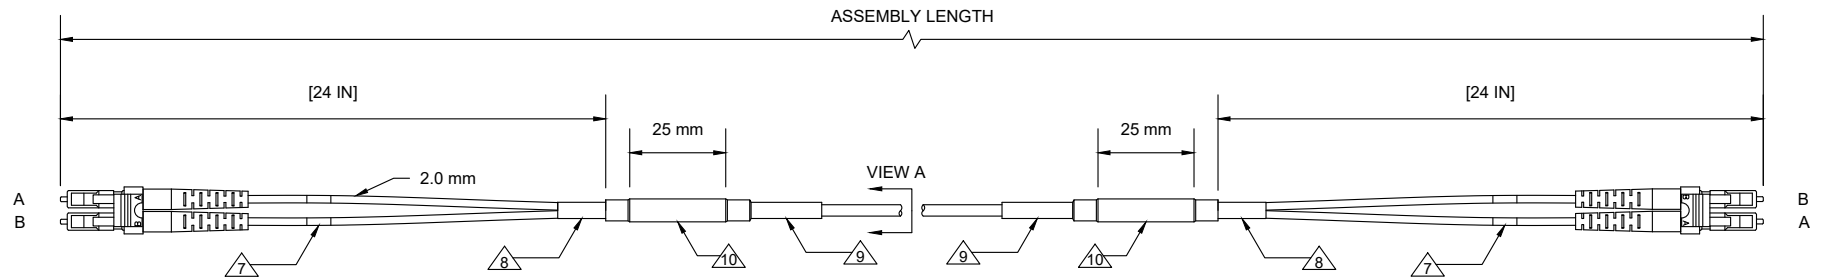

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	SINGLE-MODE UPC TEST REPORT
3	1	SINGLE LEG BREAKOUT: 2 mm FIBER LEGS, YELLOW.
2	AR	SINGLE-MODE OS2 2-FIBER MICRO ARMOR™ OFCP INDOOR/OUTDOOR CABLE; BLACK: PERFORMA, CORNING GLASS AND PRINT
1	4	LC-CLIPPED UPC POLISH, BLUE HOUSING, BLUE BOOT: PERFORMA

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION:		LC-CLIPPED/LC-CLIPPED UPC POLISH x2-FIBER OS2 MICRO ARMOR™ OFCP INDOOR/OUTDOOR CABLE w/CP&G FIBER, SINGLE LEG BREAKOUT, TEST REPORT	
DRAWN BY:	K. THOMAS	09/05/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	10/27/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC/LC x2-FIBER SM OFCP MICRO ARMOR™	
PROPRIETARY AND CONFIDENTIAL		SIZE	DWG. NO.
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	SUPQ02LCLCFXXPX
		SCALE: NOT TO SCALE	
		SHEET 1 OF 1	