
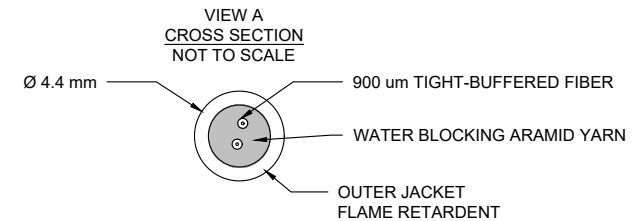


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. HEAT SHRINK FOR STRAIN RELIEF

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	12/01/2017	A.J

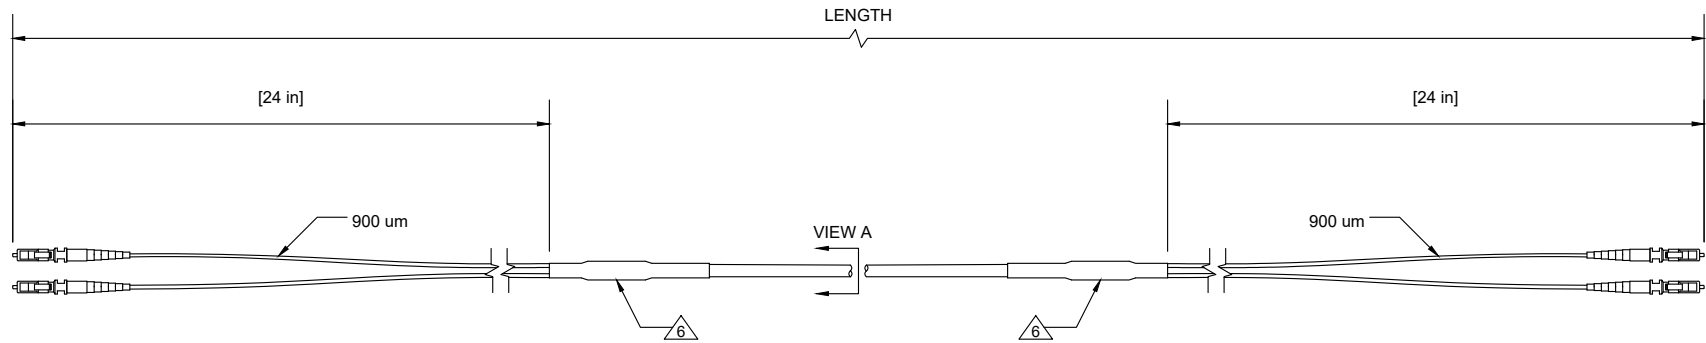

DESCRIPTION: LC-NO CLIPPED / LC-NO CLIPPED, UPC POLISH, x2 FIBER OS2 SINGLE-MODE OFNR INDOOR/OUTDOOR CABLE, 900 um BREAKOUT

DRAWN BY:	M. KHANFIR K. THOMAS	12/01/2017
APVD BY:	A. JENSEN	12/01/2017



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

TITLE: LC/LC 2 FIBER SM IN/OUT 900 um

PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

SIZE	DWG. NO.	REV
A	SURO02LBLB9XXPX	A

SCALE: NOT TO SCALE

SHEET 1 OF 1

BILL OF MATERIALS

ITEM	QTY	COMPONENT
2	AR	SINGLE-MODE OS2 OFNR IN/OUT CABLE; BLACK
1	4	LC-NO CLIP UPC POLISH, PERFORMA, BLUE HOUSING, BLUE BOOT

UPC TEST LIMITS AT 1310 nm

MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB