
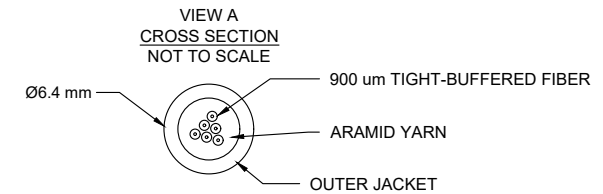


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. HEAT SHRINK -ADHESIVE, SECURED ARAMID YARN AND JACKET: 2 PLACES.
7. HEAT SHRINK FOR STRAIN RELIEF: 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	12/20/2017	A.J

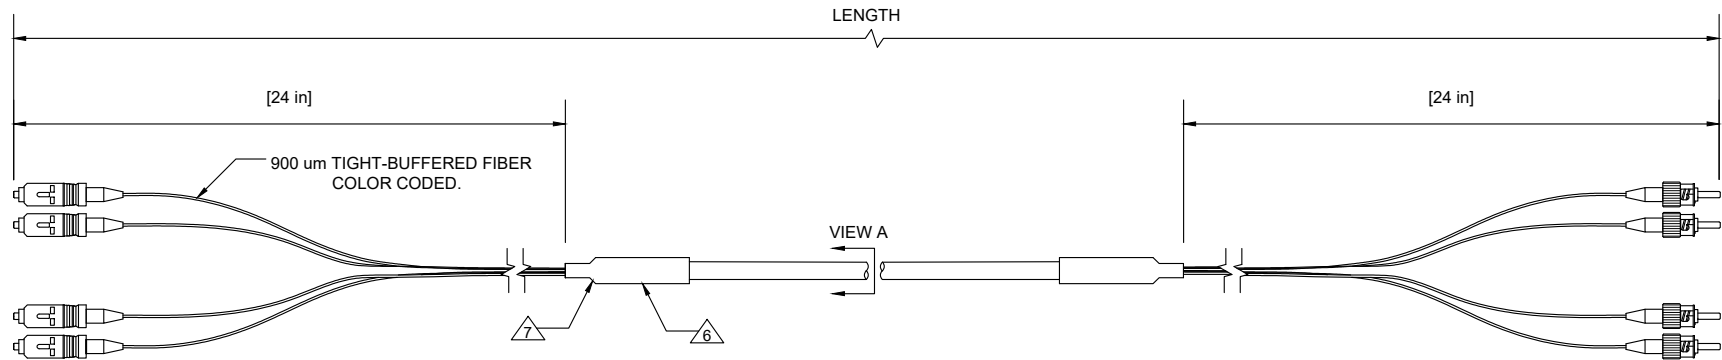

DESCRIPTION: SC-NO CLIP UPC POLISH / ST UPC POLISH, SINGLEMODE OS2 x4 FIBER TERMINATED, 6 FIBER OFNR IN/OUT CABLE, 900 um BREAKOUT.

DRAWN BY:	M. KHANFIR	12/20/2017
APVD BY:	A. JENSEN	12/20/2017



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
3	AR	6 FIBER SINGLE-MODE OS2 OFNR IN/OUT CABLE; BLACK; PERFORMA				
2	4	ST UPC POLISH, METAL HOUSING, BLUE BOOT; PERFORMA				
1	4	SC-NO CLIP UPC POLISH, BLUE HOUSING, BLUE BOOT, PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB

DIMENSIONS: METRIC [IMPERIAL]		TITLE: SC/ST 4 FIBER SM IN/OUT 900 um	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.	SIZE A	DWG. NO. SURO04SBST9XXPX	REV A
SCALE: NOT TO SCALE		SHEET 1 OF 1	