



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP. 12 PLACES.
7. C-BREAK. OVERALL DIAMETER 16 mm.
8. HEAT SHRINK.
9. HEAT SHRINK FOR STRAIN RELIEF.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K.	09/20/2018	A.J.

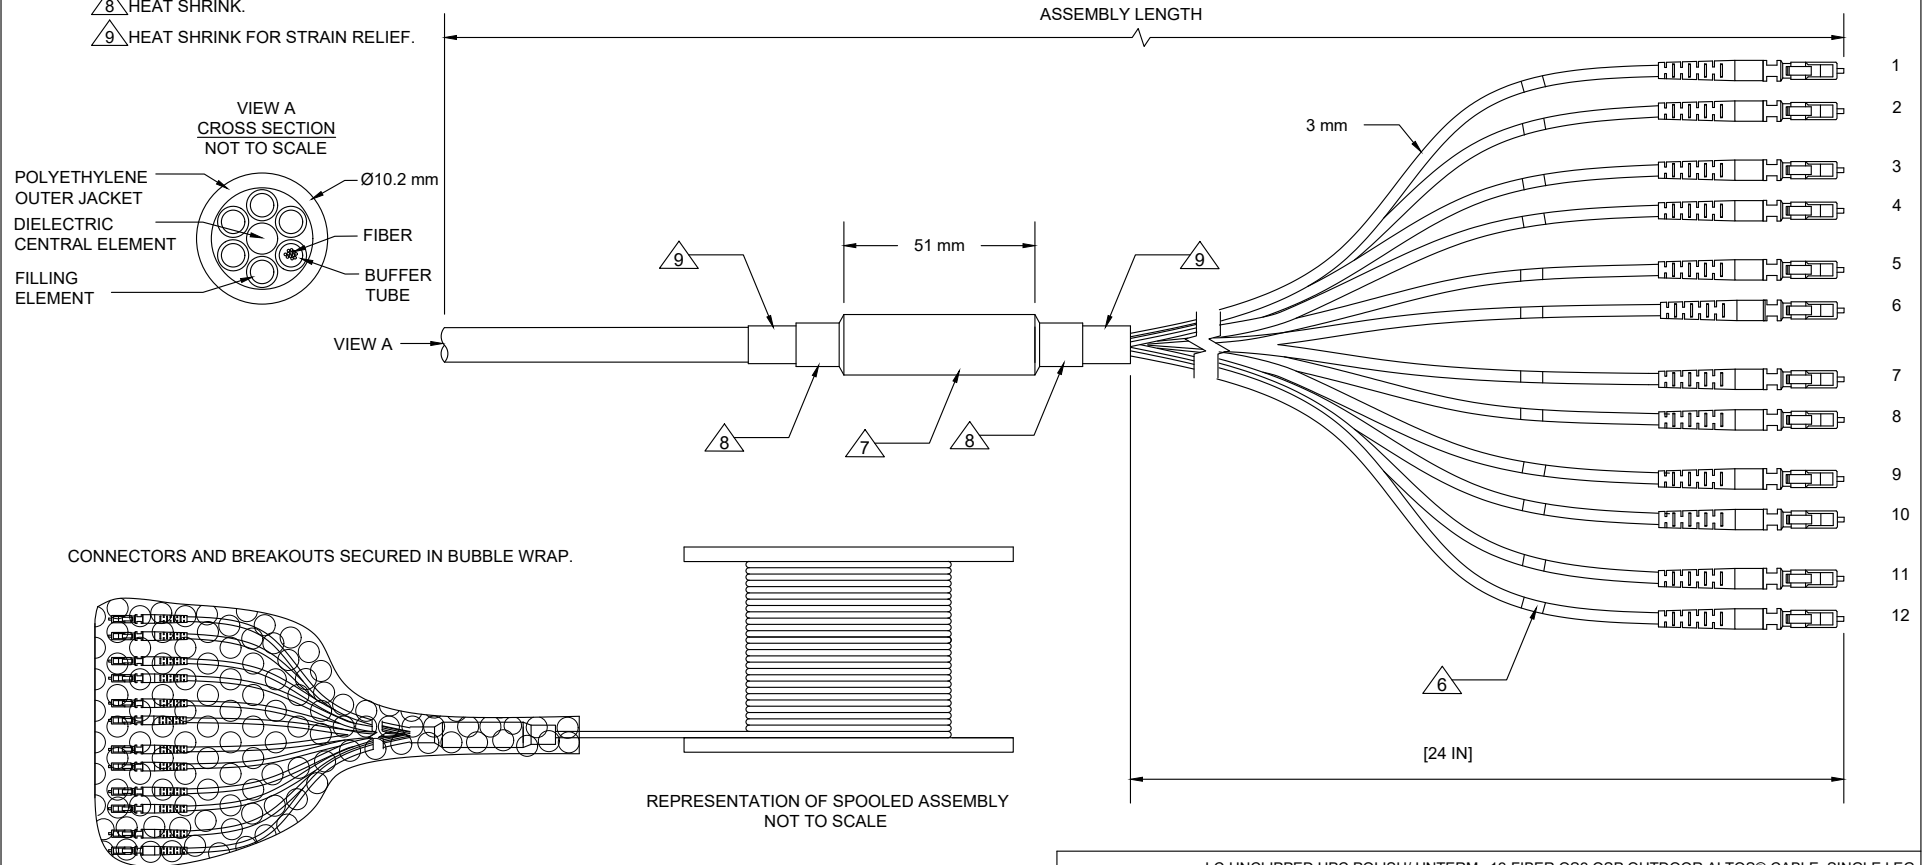


CONNECTORS AND BREAKOUTS SECURED IN BUBBLE WRAP.

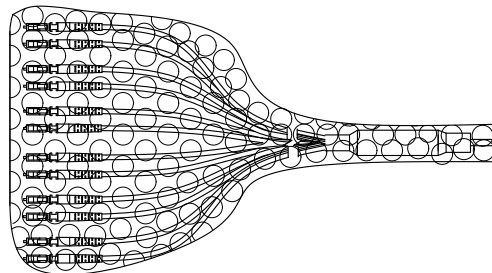

REPRESENTATION OF SPOOLED ASSEMBLY NOT TO SCALE

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
5	1	SINGLE-MODE UPC CORNING LOW LOSS SPEC TEST REPORT
4	1	SPOOL
3	1	SINGLE LEG BREAKOUT: 3 mm FIBER LEGS, YELLOW,
2	AR	SINGLE-MODE OS2 12 FIBER OSP ALTOS® OUTDOOR CABLE; BLACK; CORNING.
1	12	LC-UNCLIPPED UPC POLISH CONNECTOR; BLUE HOUSING, BLUE BOOT; PERFORMA.

SINGLE-MODE UPC TEST LIMITS AT 1310 nm				
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	
≤0.15dB	0.10dB	≥55dB	58dB	

DESCRIPTION: LC-UNCLIPPED UPC POLISH/ INTERM x12-FIBER OS2 OSP OUTDOOR ALTOS® CABLE, SINGLE LEG BREAKOUT; 3 mm FURCATION, CORNING LOW LOSS SPEC TEST REPORT, SPOOLED, SUPRA.				
DRAWN BY:	M. KHANFIR	09/19/2018	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY:	A. JENSEN	09/20/2018		
DIMENSIONS: METRIC [IMPERIAL]			TITLE:	LC-NO CLIP INTERM OS2 OUTDOOR 12 FIBER ASM
PROPRIETARY AND CONFIDENTIAL			SIZE:	DWG. NO.
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SUOD12LBXXEEXSS
			SCALE: NOT TO SCALE	SHEET 1 OF 1